

Optical flow




Many slides adapted from S. Seitz, R. Szeliski, M. Pollefeys

Slides from S. Lazebnik.

Motion is a powerful perceptual cue

- Sometimes, it is the only cue

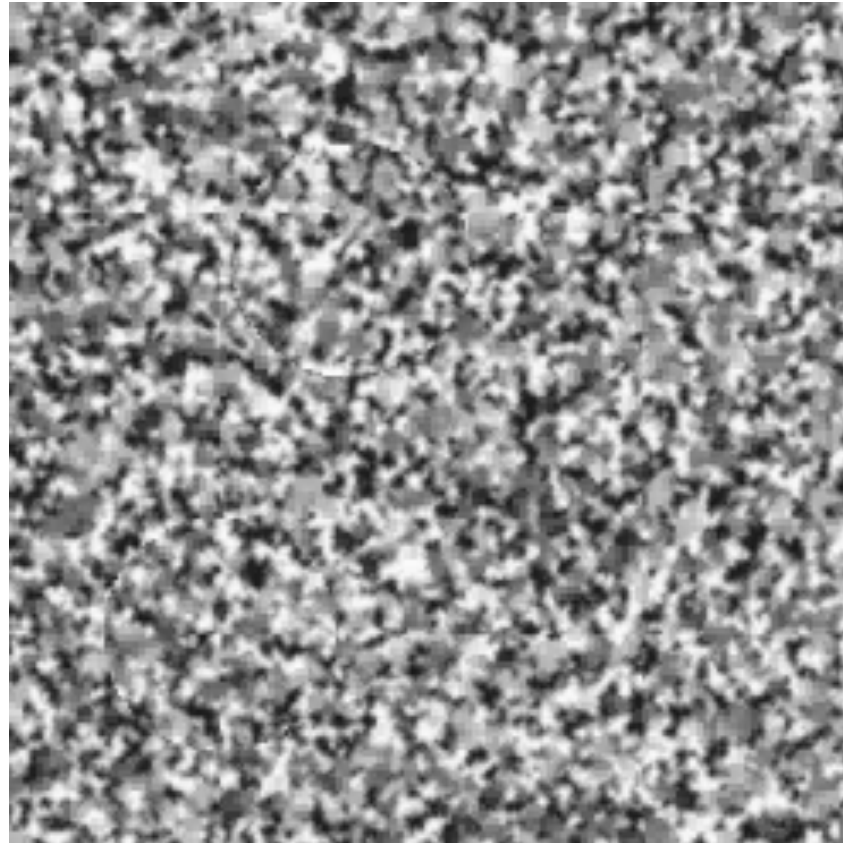

Motion is a powerful perceptual cue

- Even “impoverished” motion data can evoke a strong percept



G. Johansson, “Visual Perception of Biological Motion and a Model For Its Analysis”,
Perception and Psychophysics 14, 201-211, 1973.

Motion is a powerful perceptual cue

- Even “impoverished” motion data can evoke a strong percept





G. Johansson, “Visual Perception of Biological Motion and a Model For Its Analysis”,
Perception and Psychophysics 14, 201-211, 1973.

Uses of motion in computer vision

- 3D shape reconstruction
- Object segmentation
- Learning and tracking of dynamical models
- Event and activity recognition
- Self-supervised and predictive learning

Motion field


- The motion field is the projection of the 3D scene motion into the image

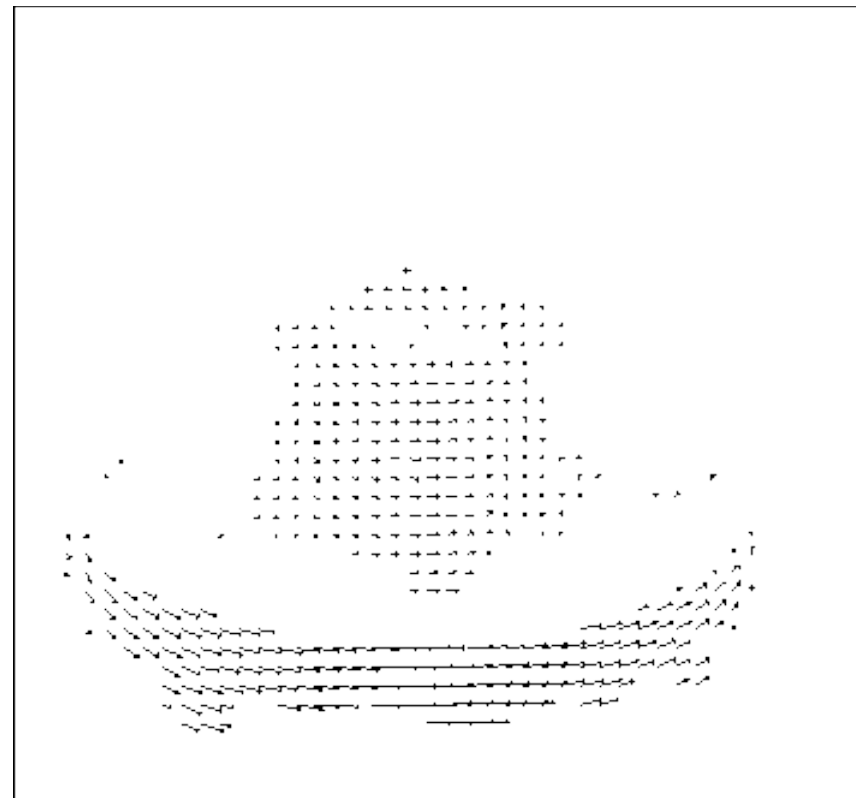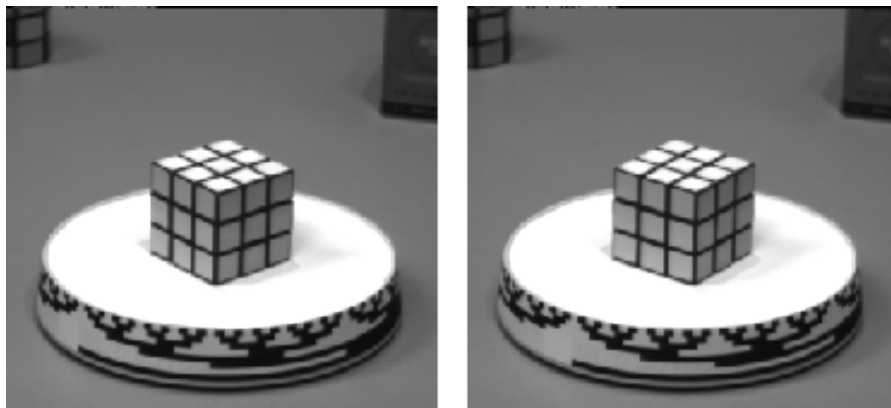


Optical flow

- **Definition:** optical flow is the *apparent* motion of brightness patterns in the image
- Ideally, optical flow would be the same as the motion field
- Have to be careful: apparent motion can be caused by lighting changes without any actual motion
 - Think of a uniform rotating sphere under fixed lighting vs. a stationary sphere under moving illumination

Estimating optical flow

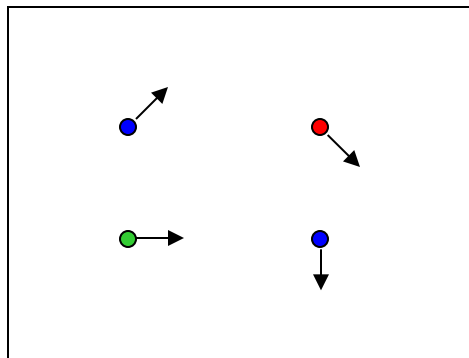


$I(x,y,t-1)$

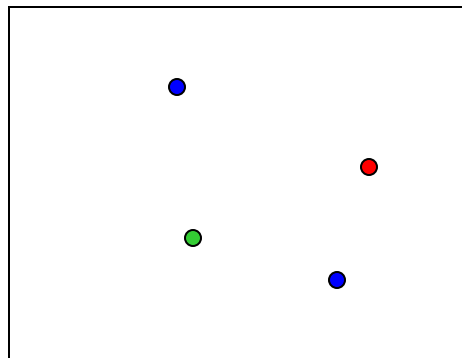

$I(x,y,t)$

- Given two subsequent frames, estimate the apparent motion field $u(x,y)$ and $v(x,y)$ between them
- Key assumptions
 - **Brightness constancy:** projection of the same point looks the same in every frame
 - **Small motion:** points do not move very far
 - **Spatial coherence:** points move like their neighbors

The brightness constancy constraint

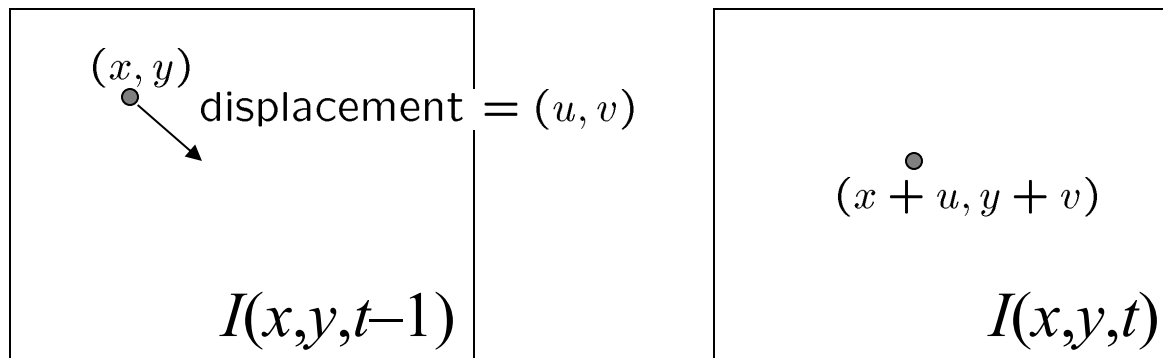

Brightness Constancy Equation:

$$I(x, y, t - 1) = I(x + u(x, y), y + v(x, y), t)$$

Linearizing the right side using Taylor expansion:

$$I(x, y, t - 1) \approx I(x, y, t) + I_x u(x, y) + I_y v(x, y)$$

Hence,
$$I_x u + I_y v + I_t \approx 0$$

The brightness constancy constraint

$$I_x u + I_y v + I_t = 0$$

- How many equations and unknowns per pixel?
 - One equation, two unknowns

- What does this constraint mean?

$$\nabla I \cdot (u, v) + I_t = 0$$

- The component of the flow perpendicular to the gradient (i.e., parallel to the edge) is unknown!

The brightness constancy constraint


$$I_x u + I_y v + I_t = 0$$

- How many equations and unknowns per pixel?
 - One equation, two unknowns
- What does this constraint mean?


$$\nabla I \cdot (u, v) + I_t = 0$$

- The component of the flow perpendicular to the gradient (i.e., parallel to the edge) is unknown!

If (u, v) satisfies the equation,
so does $(u+u', v+v')$ if $\nabla I \cdot (u', v') = 0$

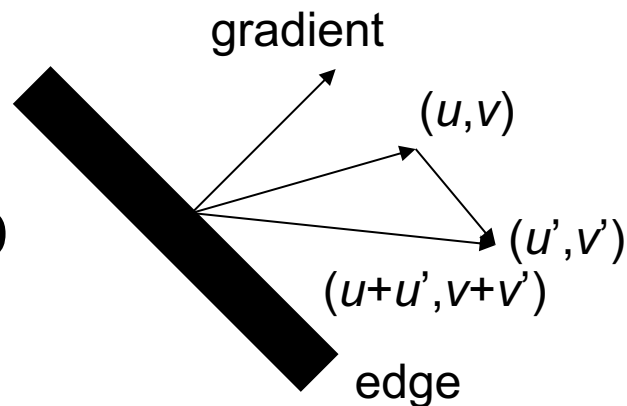


The aperture problem

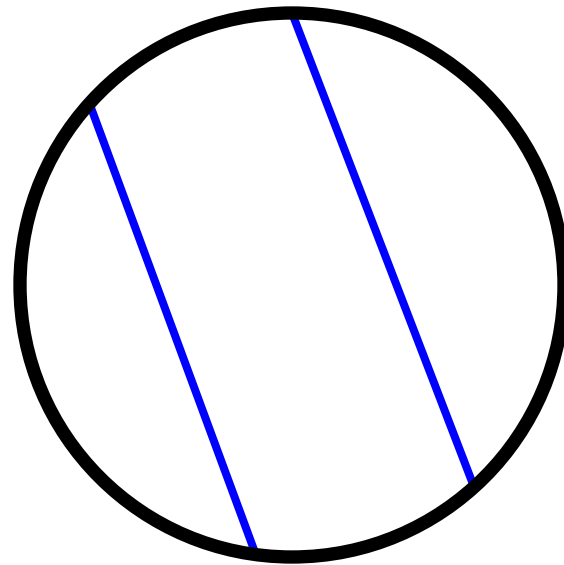

Perceived motion

The aperture problem

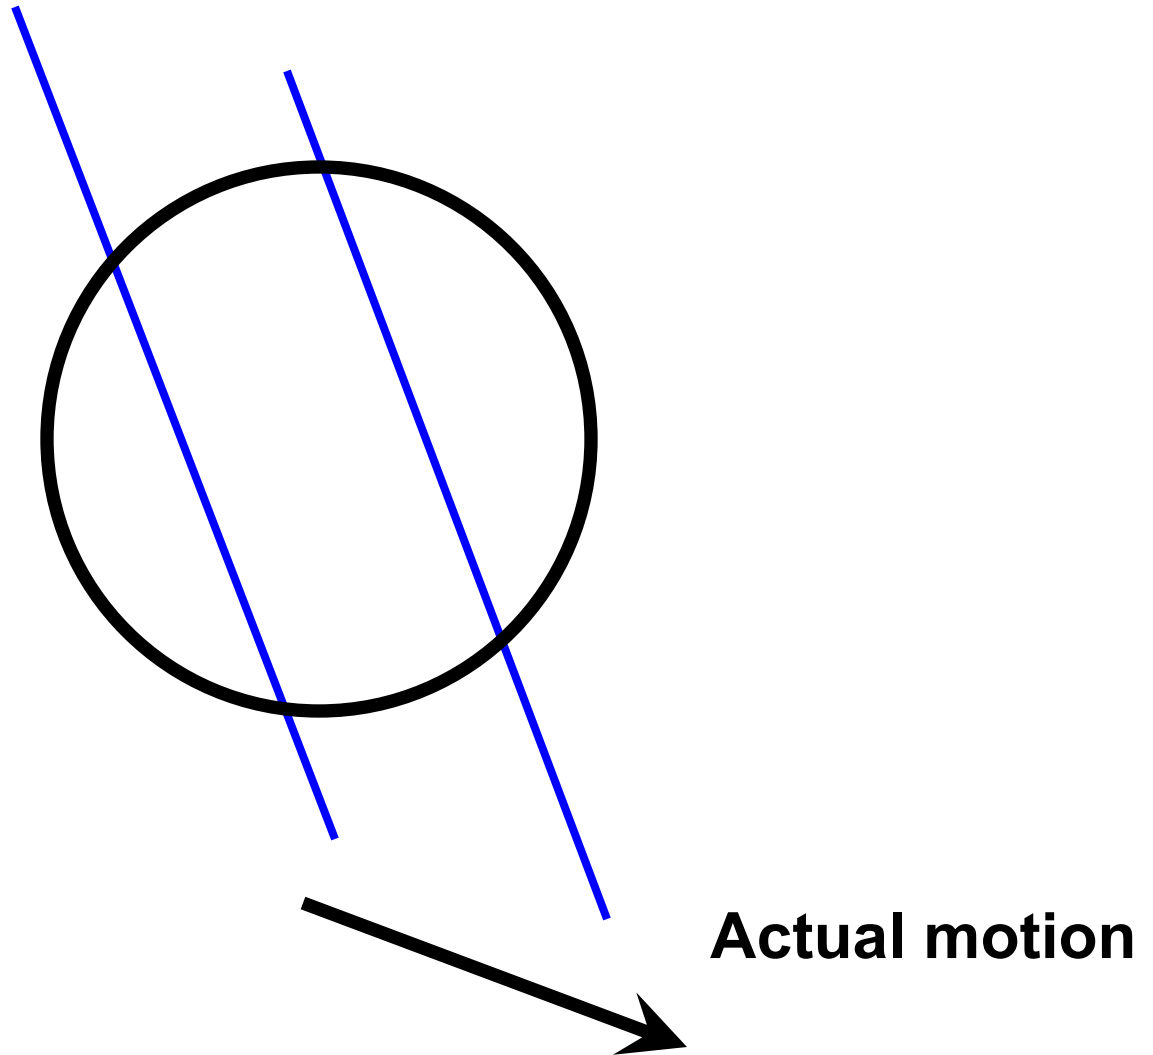

The barber pole illusion



http://en.wikipedia.org/wiki/Barberpole_illusion

The barber pole illusion



http://en.wikipedia.org/wiki/Barberpole_illusion

Solving the aperture problem

- How to get more equations for a pixel?
- **Spatial coherence constraint:** assume the pixel's neighbors have the same (u,v)
 - E.g., if we use a 5x5 window, that gives us 25 equations per pixel

$$\nabla I(\mathbf{x}_i) \cdot [u, v] + I_t(\mathbf{x}_i) = 0$$

$$\begin{bmatrix} I_x(\mathbf{x}_1) & I_y(\mathbf{x}_1) \\ I_x(\mathbf{x}_2) & I_y(\mathbf{x}_2) \\ \vdots & \vdots \\ I_x(\mathbf{x}_n) & I_y(\mathbf{x}_n) \end{bmatrix} \begin{bmatrix} u \\ v \end{bmatrix} = - \begin{bmatrix} I_t(\mathbf{x}_1) \\ I_t(\mathbf{x}_2) \\ \vdots \\ I_t(\mathbf{x}_n) \end{bmatrix}$$

B. Lucas and T. Kanade. [An iterative image registration technique with an application to stereo vision](#). In *Proceedings of the International Joint Conference on Artificial Intelligence*, pp. 674–679, 1981.

Lucas-Kanade flow

- Linear least squares problem:

$$\begin{bmatrix} I_x(\mathbf{x}_1) & I_y(\mathbf{x}_1) \\ I_x(\mathbf{x}_2) & I_y(\mathbf{x}_2) \\ \vdots & \vdots \\ I_x(\mathbf{x}_n) & I_y(\mathbf{x}_n) \end{bmatrix} \begin{bmatrix} u \\ v \end{bmatrix} = - \begin{bmatrix} I_t(\mathbf{x}_1) \\ I_t(\mathbf{x}_2) \\ \vdots \\ I_t(\mathbf{x}_n) \end{bmatrix}$$

- When is this system solvable?

B. Lucas and T. Kanade. [An iterative image registration technique with an application to stereo vision](#). In *Proceedings of the International Joint Conference on Artificial Intelligence*, pp. 674–679, 1981.

Lucas-Kanade flow

- Linear least squares problem:

$$\begin{bmatrix} I_x(\mathbf{x}_1) & I_y(\mathbf{x}_1) \\ I_x(\mathbf{x}_2) & I_y(\mathbf{x}_2) \\ \vdots & \vdots \\ I_x(\mathbf{x}_n) & I_y(\mathbf{x}_n) \end{bmatrix} \begin{bmatrix} u \\ v \end{bmatrix} = - \begin{bmatrix} I_t(\mathbf{x}_1) \\ I_t(\mathbf{x}_2) \\ \vdots \\ I_t(\mathbf{x}_n) \end{bmatrix}$$

$$\mathbf{A} \mathbf{d} = \mathbf{b}$$

$n \times 2$ 2×1 $n \times 1$

- Solution given by $(\mathbf{A}^T \mathbf{A})\mathbf{d} = \mathbf{A}^T \mathbf{b}$

$$\begin{bmatrix} \sum I_x I_x & \sum I_x I_y \\ \sum I_x I_y & \sum I_y I_y \end{bmatrix} \begin{bmatrix} u \\ v \end{bmatrix} = - \begin{bmatrix} \sum I_x I_t \\ \sum I_y I_t \end{bmatrix}$$


$\mathbf{M} = \mathbf{A}^T \mathbf{A}$ is the
second moment
matrix!

(summations are over all
pixels in the window)

B. Lucas and T. Kanade. [An iterative image registration technique with an application to stereo vision](#). In *Proceedings of the International Joint Conference on Artificial Intelligence*, pp. 674–679, 1981.


Recall: second moment matrix

- Estimation of optical flow is well-conditioned precisely for regions with high “cornerness”:

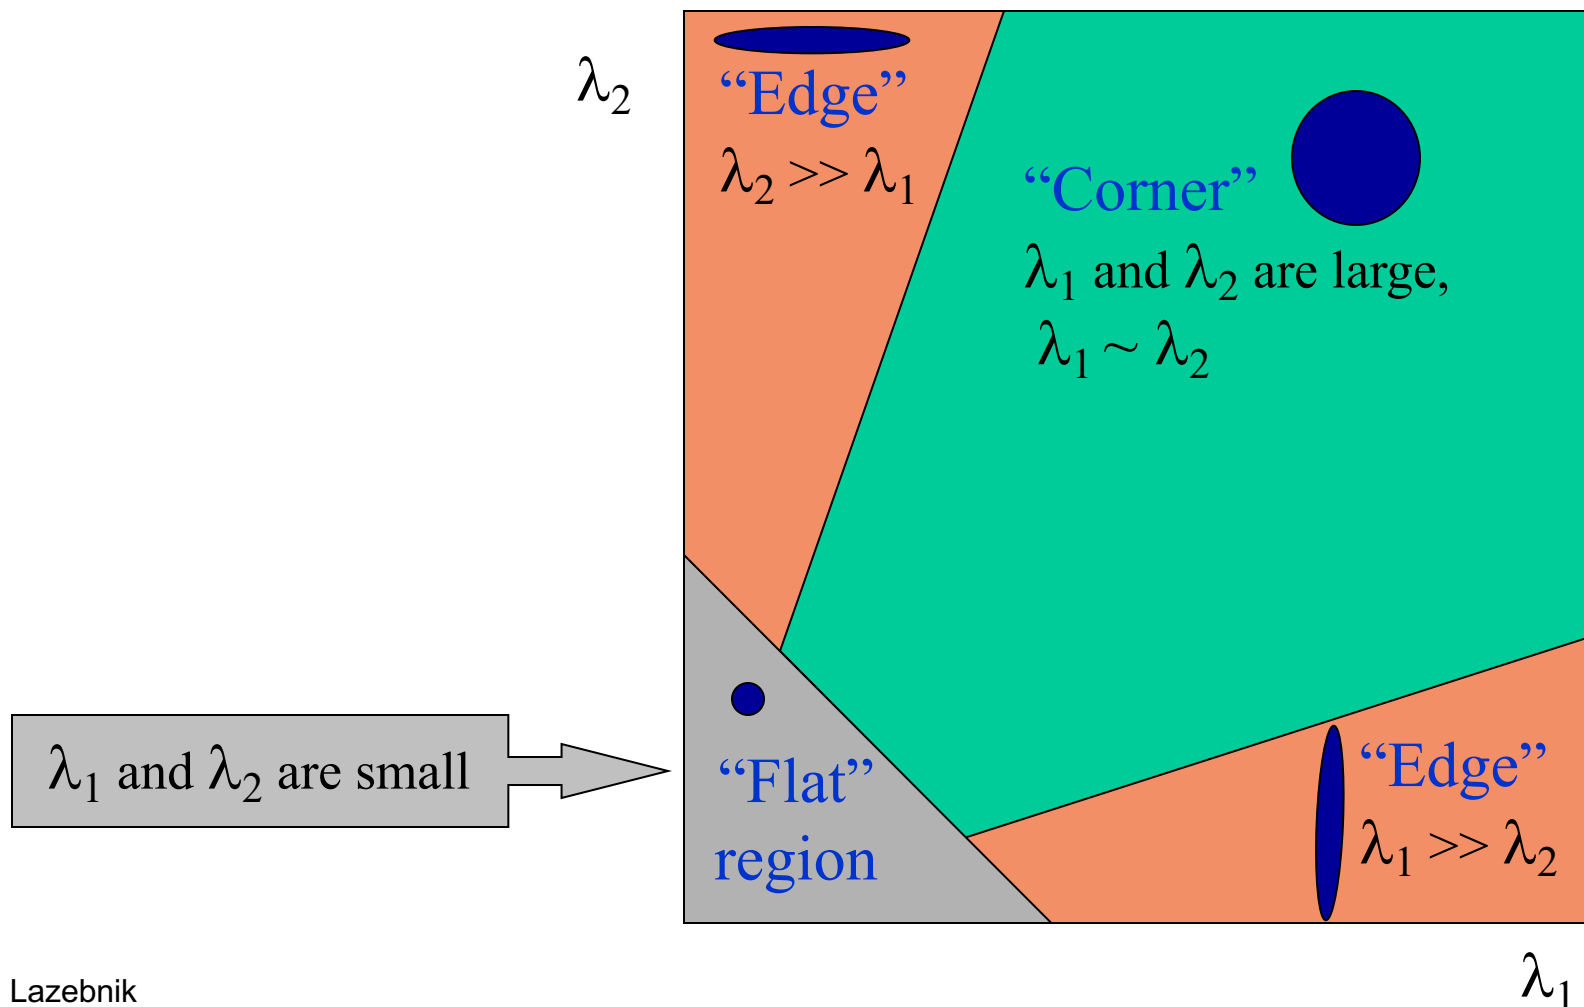

Conditions for solvability

- “Bad” case: single straight edge

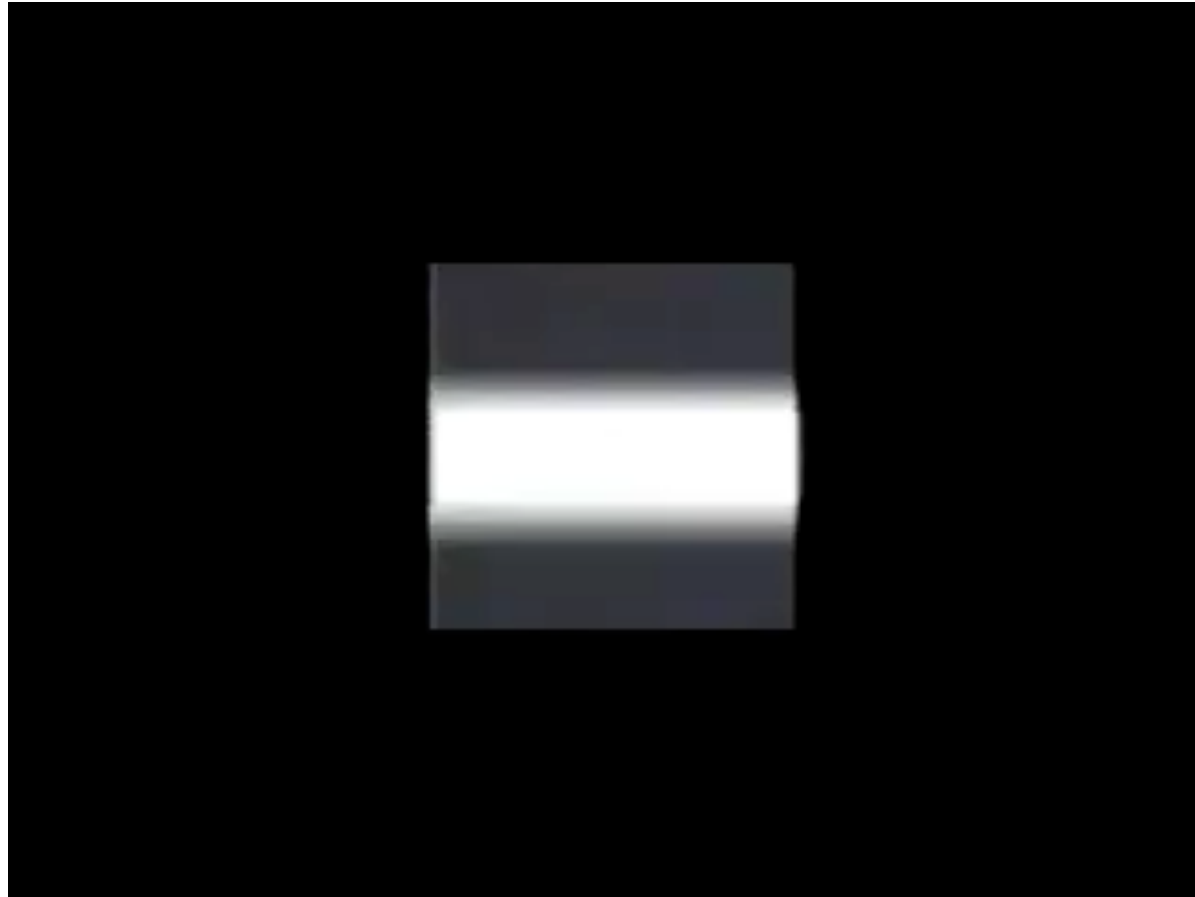

Conditions for solvability

- “Good” case




Lucas-Kanade flow example

Input frames



Output

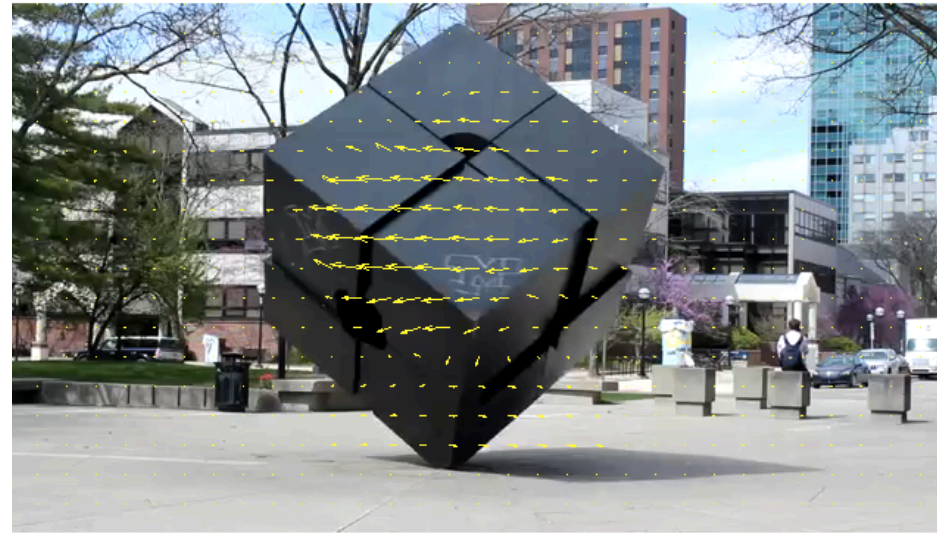


Errors in Lucas-Kanade

- The motion is large (larger than a pixel)
- A point does not move like its neighbors
- Brightness constancy does not hold

“Flower garden” example






“Flower garden” example

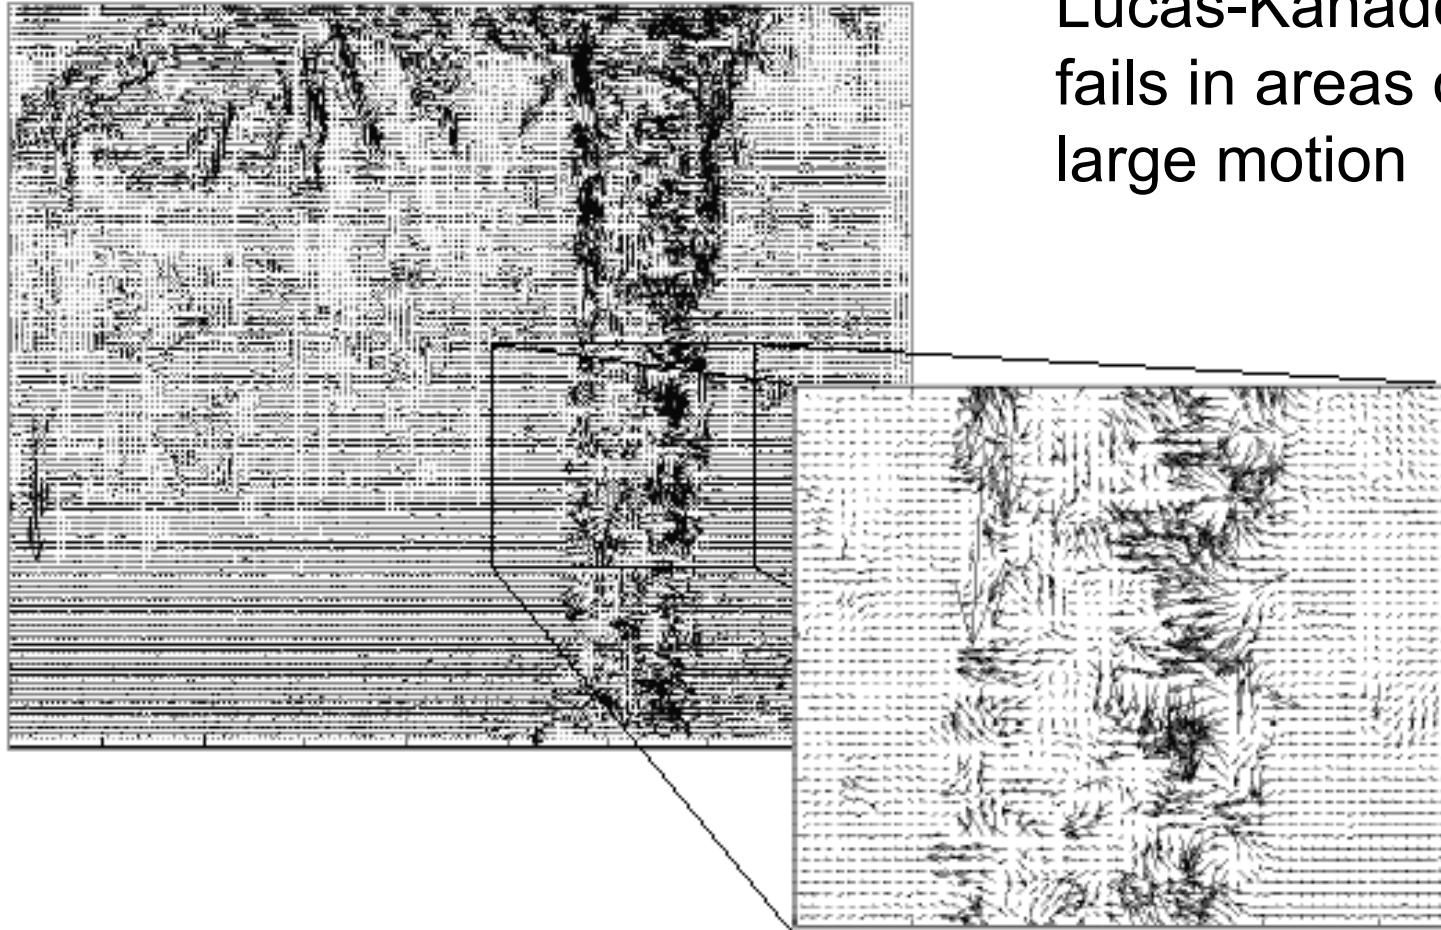


Lucas-Kanade
fails in areas of
large motion

Multi-resolution estimation

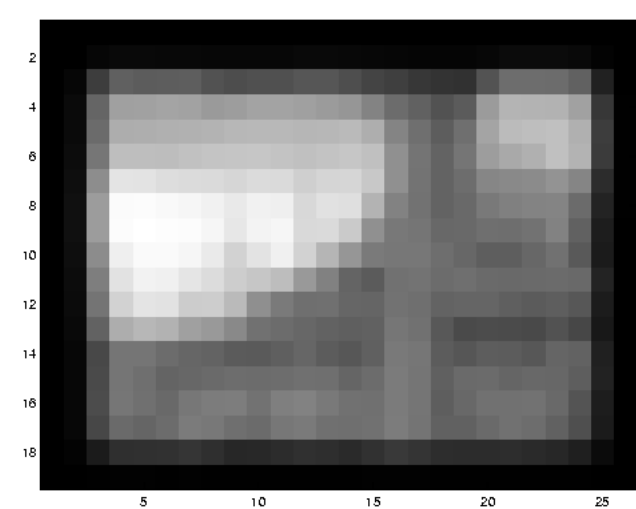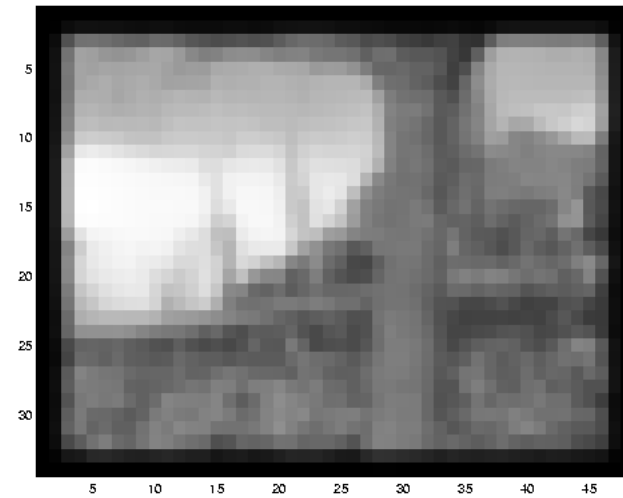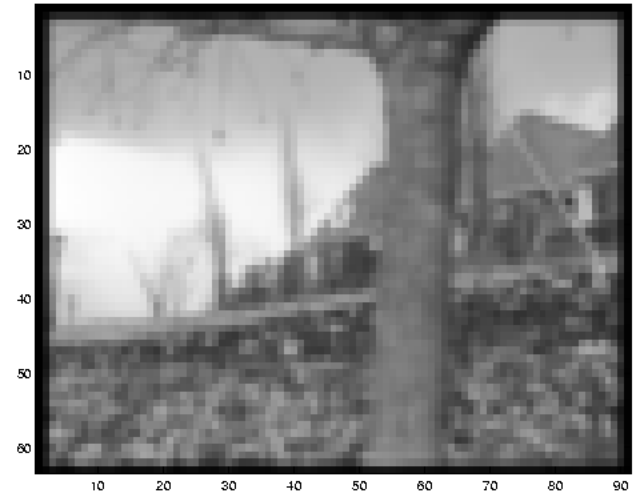

Multi-resolution estimation

With multi-resolution estimation

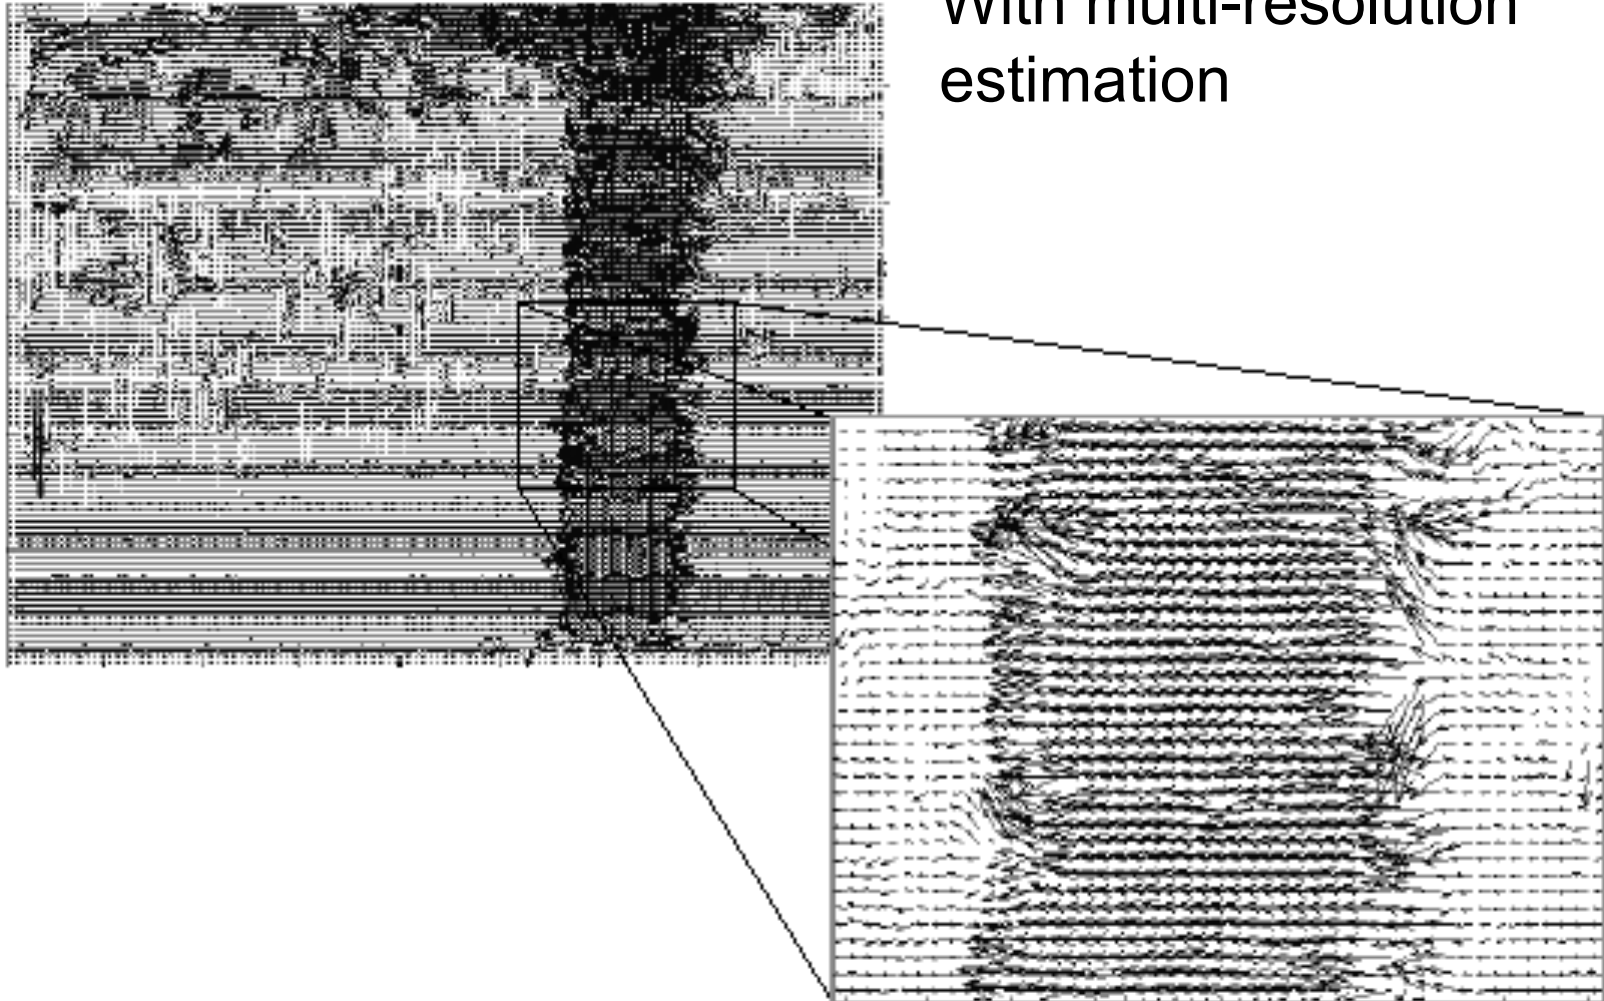

Fixing the errors in Lucas-Kanade

- The motion is large (larger than a pixel)
 - Multi-resolution estimation, iterative refinement
 - Feature matching
- A point does not move like its neighbors
 - Motion segmentation

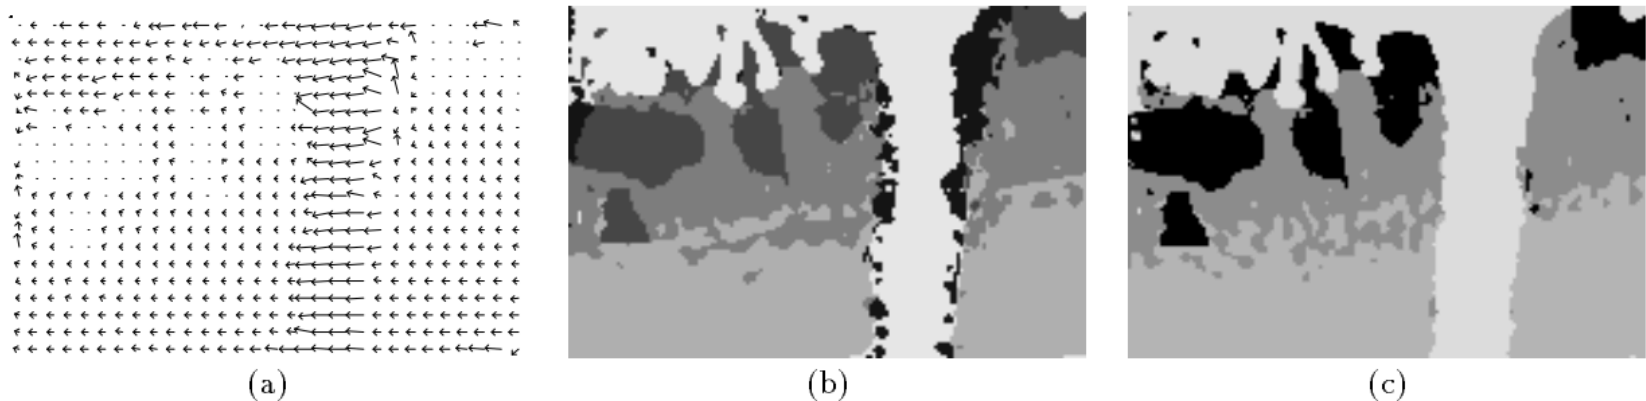


Figure 11: (a) The optic flow from multi-scale gradient method. (b) Segmentation obtained by clustering optic flow into affine motion regions. (c) Segmentation from consistency checking by image warping. Representing moving images with layers.

J. Wang and E. Adelson, [Representing Moving Images with Layers](#), IEEE Transactions

on Image Processing, 1994

Fixing the errors in Lucas-Kanade

- The motion is large (larger than a pixel)
 - Multi-resolution estimation, iterative refinement
 - Feature matching
- A point does not move like its neighbors
 - Motion segmentation
- Brightness constancy does not hold
 - Feature matching